

# A-ISOMETER® IR470LY...

Insulation monitoring device for unearthed AC and 3(N)AC systems (IT systems)



IR470LY

### Device features

- Insulation monitoring for unearthed IT AC / 3(N)AC systems 0...793 V
- Nominal voltage extendable via coupling device
- Response values, adjustable 1...200 kΩ
- Connection monitoring system / earth
- Power ON LED, Alarm LED for signalling AC, L+, L- insulation faults
- LED bar graph indicator for signalling AC, L+, L- insulation faults
- Connection for kΩ indication
- Combined test and reset button
- Connection external test / reset button
- Alarm relay with two potential-free changeover contacts
- N/O or N/C operation, selectable
- Fault memory behaviour, selectable

### Standards, approvals and certifications




Response delay			
Type	*) Response time $t_{an}$ in the 10...200 kΩ range	*) Response time $t_{an}$ in the 1...20 kΩ range	System leakage capacitance $C_e$ max.
IR470LY-40...	≤ 1 s	≤ 3 s	20 μF

\*) Response times acc. to IEC 61557-8 at  $R_F = 0.5 \times R_{an}$  and at 1 μF system leakage capacitance.

### Dimension diagram X470

Dimensions in mm

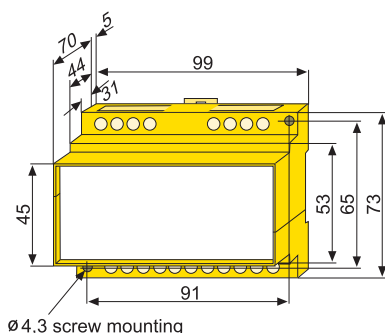

### Product description

The A-ISOMETER®s of the IR470LY series monitor the insulation resistance of unearthed AC and three-phase systems (IT systems) AC / 3(N)AC 0...793 V. In combination with a coupling device, the devices can also be used for higher voltages. An external supply voltage allows de-energised systems to be monitored too.

The systems to be monitored should not contain DC components. Due to the measuring method, insulation faults downstream of directly connected rectifiers are indicated with increased response sensitivity. The set response values apply to the pure AC system only.

### Application

AC/3(N)AC main circuits (without directly connected rectifiers), such as motors, pumps, rolling mills without variable-speed drives, air cooling and air conditioning systems, lighting systems, heating systems, mobile generators, building services, domestic electrical installation practice, etc.

### Function

When the insulation resistance between the system conductors and earth falls below the set response value, the alarm relay switches and the alarm LEDs light up. In case of interruption of the system and earth connection, the alarm LEDs flash. Different alarm LEDs AC, DC+, DC- allow to distinguish between insulation faults on the AC and the DC side. The measured value is indicated by the LED bar graph indicator or a measuring instrument that can be connected externally. In this way any changes, for example when circuits are connected to the system, can be recognised easily. The fault message can be stored. The fault memory can be reset by pressing the reset button. The device function can be tested using the test button.

### Measurement method

Superimposed DC voltage with inverter.

### Standards


The IR470LY series complies with the requirements of the device standards: IEC 61557-8, ASTM F1669M-96 (2007).

Ordering information					
Type	Supply voltage $U_S$	Art. No.	Type	Supply voltage $U_S$	Art. No.
IR470LY-40	AC 230 V	B 9104 8007	IR470LY-4016	AC 500 V	B 9104 8018
IR470LY-4011	AC 24 V	B 9104 8012	IR470LY-4017	AC 690 V	B 9104 8017
IR470LY-4012	AC 42 V	B 9104 8002	IR470LY-4018	AC 440 V	B 9104 8024
IR470LY-4013	AC 90...132 V*	B 9104 8011	IR470LY-4021	DC 9.6...84V*	B 9104 8006
IR470LY-4015	AC 400 V	B 9104 8008	IR470LY-4023	DC 77...286V*	B 9104 8026


Other supply voltages on request \* Absolute values

Accessories					
External kΩ measuring instruments			Coupling devices		
Type	Art. No.	Type	Nominal system voltage $U_n$	Art. No.	
7204-1421	B 986 763	AGH204S-4	AC 0...1650 V	B 914 013	
9604-1421	B 986 764	AGH520S	AC 0...7200 V	B 913 033	

Wiring diagram – Front plate and system connection

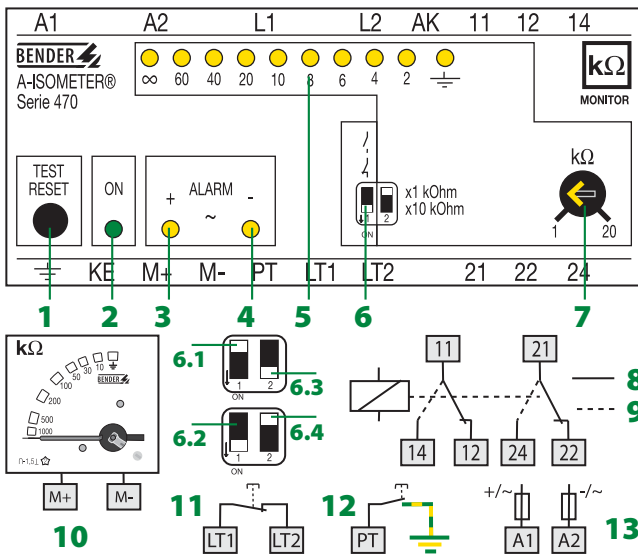

- 1 - Combined test/reset button "TEST/RESET"; short-time pressing (< 1 s) = RESET, long-time pressing (> 1 s) = TEST
- 2 - LED Power "ON"
- 3,4 - Alarm LEDs "+ ALARM -", yellow, light when the value falls below the set response value and flash in case of interruption of the connecting leads E / KE or L1 / L2
- 5 - LED bar graph indicator
- 6 - Operating principle of the alarm relays and setting range  $R_{ALARM}$   
 6.1 - N/O operation                      6.3 - x 10 kΩ  
 6.2 - N/C operation                      6.4 - x 1 kΩ  
 Changing the setting range from x 1 kΩ to x 10 kΩ automatically changes the indication of the kΩ values on the LED bar graph indicator: Setting range x 1 kΩ: Meter scale point x 1 kΩ. Setting range: x 10 kΩ: Meter scale point has to be multiplied by 10 kΩ.
- 7 - Potentiometer to set the response value  $R_{ALARM}$
- 8 - Alarm relay - N/O operation (basic setting)
- 9 - Alarm relay - N/C operation
- 10 - External kΩ indicating instrument
- 11 - External reset button "LT1, LT2" or bridge for fault memory
- 12 - External test button "PT"
- 13 -  $U_5$  see ordering information, 6 A fuse recommended

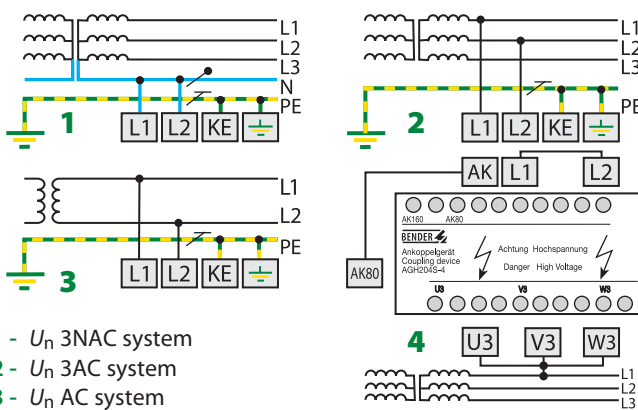

- 1 -  $U_n$  3NAC system
- 2 -  $U_n$  3AC system
- 3 -  $U_n$  AC system
- 4 -  $U_n$  with coupling devices: AGH204S-4 = 0...1300 V resp. 0...1650 V, AGH520S = 0...7200 V, here: coupling device AGH204S-4 connected to  $U_n$  3AC system

Technical data

Insulation coordination acc. to IEC 60664-1

Rated insulation voltage	AC 630 V
Rated impulse withstand voltage/pollution degree	6 kV/3

Voltage ranges

Nominal system voltage $U_n$	AC, 3(N)AC 0...793 V
Nominal frequency $f_n$	40...460 Hz
Supply voltage $U_s$	see ordering information
Operating range of $U_s$	0.8...1.15 x $U_s$
Frequency range $U_s$	50...460 Hz
Power consumption	≤ 3 VA

Response values

Response value $R_{an1}$ (Alarm 1)	1 kΩ...200 kΩ
Response time $t_{an}$ at $R_F = 0.5 \times R_{an}$ and $C_e = 1 \mu F$	
10...200 kΩ range	≤ 1 s
1...10 kΩ range	≤ 3 s

Measuring circuit

Measuring voltage $U_m$	≤ 40 V
Measuring current $I_m$ (at $R_F = 0 \Omega$ )	≤ 200 $\mu A$
Internal DC resistance $R_i$	≥ 200 kΩ
Impedance $Z_i$ at 50 Hz	≥ 180 kΩ
Permissible extraneous DC voltage $U_{f0}$	≤ 800 V
Permissible system leakage capacitance	≤ 20 $\mu F$

Outputs

Test/reset button	internal/external
Current output for measuring instrument (scale centre point = 120 kΩ)	0...400 $\mu A$
Load	≤ 25 kΩ

Switching elements

Switching elements	2 changeover contacts
Operating principle	N/O operation / N/C operation
Factory setting	N/O operation
Electrical endurance, number of cycles	12000
Contact class	IIB
Rated contact voltage	AC 250 V/DC 300 V
Making capacity	AC/DC 5 A
Breaking capacity	2 A, AC 230 V, cos phi = 0.4 0.2 A, DC 220 V, L/R = 0.04 s
Contact rating at DC 24 V	≥ 2 mA (50 mW)

General data

Shock resistance IEC 60068-2-27 (during operation)	15 g/11 ms
Bumping IEC 60068-2-29 (transport)	40 g/6 ms
Vibration resistance IEC 60068-2-6 (during operation)	1 g/10...150 Hz
Vibration resistance IEC 60068-2-6 (transport)	2 g/10...150 Hz
Ambient temperature (during operation/during storage)	-10 °C...+55 °C/-40 °C...+70 °C
Climatic class acc. to IEC 60721-3-3	3K5
Operating mode	continuous operation
Mounting	any position
Connection type	modular terminals
Connection properties rigid / flexible	0.2...4 mm <sup>2</sup> / 0.2...2.5 mm <sup>2</sup>
Degree of protection, internal components (IEC 60529)	IP 30
Degree of protection, terminals (IEC 60529)	IP 20
Screw mounting	2 x M4
DIN rail mounting acc. to	IEC 60715
Flammability class	UL94 V-0
Operating manual	TBP104001
Weight approx.	360 g